



**PB-6 Adjustable from 11 1/4" to 11 7/16"**

(285 to 367 mm)

## COMPONENTS

The PB-6 is composed of 3 pieces  
(1 PB-4 top + 1 coupler PB-C1 + 1 PB-4 base)

## CHARACTERISTICS



Top:  $\varnothing 6 \frac{11}{16}"$

Base:  $\varnothing 7 \frac{3}{4}"$

Weight: **2.1 lb.**

Height adjustable from 11 1/4" to 11 7/16"

With addition of U-PH5 slope corrector, adjustable in height from 11 3/4" to 15" and slope from 0 to 5%

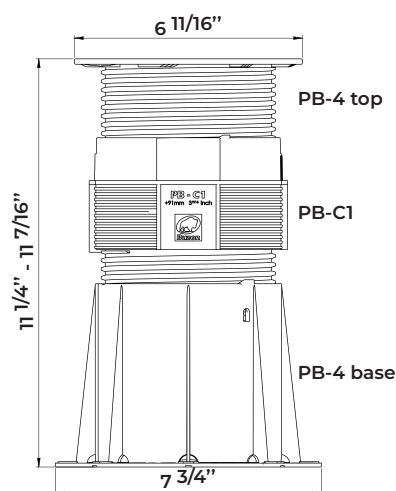

## MATERIAL


Copolymer polypropylene (CPP) made from 95% recycled plastics

Designed and manufactured in Europe

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide range of chemicals

Temperature range: -22°F to +176°F

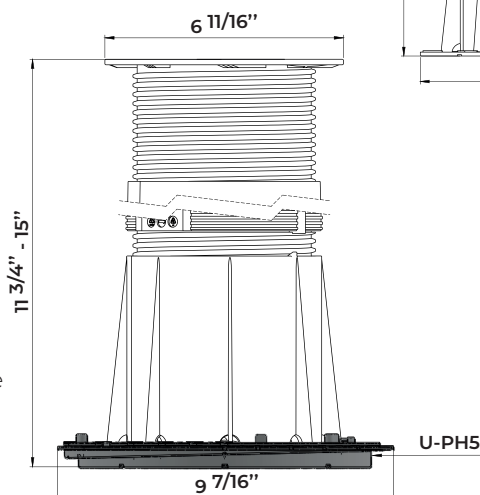

## PACKAGING

## Packaging PB-4-Base

Pieces per carton: 24 pcs

Carton weight: **21.6 lb.**

Carton dimension: 24" x 16" x 18"

Cartons per pallet: **25 pcs**

Pieces per pallet: **600 pcs**

Pallet dimensions: **39" x 47" x 87"**

## Packaging PB-C1

Pieces per carton: **24 pcs**

Carton weight: **14.4 lb.**

Carton dimension: 24" x 16" x 17"

Cartons per pallet: **25 pcs**

Pieces per pallet: 600 pcs

Pallet dimensions: **39" x 47" x 87"**

## Packaging PB-4-Top

Pieces per carton: **24 pcs**

Carton weight: **20 lb.**

Carton dimension: 24" x 16" x 18"

Cartons per pallet: **25 pcs**

Pieces per pallet: **600 pcs**

Pallet dimensions: 39" x 47" x 87"

## APPLICATIONS


Buzon pedestals can be used for a wide range of outdoor applications, such as terraces, pool decks and water features, in landscape areas and on rooftops...

Finishing materials can be freely specified by the designer. Accessories are available for applications with various outdoor finishes, such as granite stone pavers, composite / timber decking, ceramic tiles and fibreglass or metal grating panels. Buzon pedestals can be installed on a wide range of solid and stable substrates, such as concrete slabs, cement screeds, waterproof membranes, insulation panels.

### Spacer Tabs




### Shims



U-E10 : 1/32"

### Shims



U-E20 : 1/16"

## COMPRESSION TEST\*

Performed on the full (1/1), half (1/2) and quarter (1/4) surface of the head (1kN= 1kg / F= 224,8 lbf)

Position	Height (mm)	Breaking load (kN)	Breaking load (lbf)
1/1	367	11,53 (1 153 kg)	2 594
1/2 **	367	10,64 (1 064 kg)	2 394
1/4 **	367	7,56 (756 kg)	1 703

\* Tests carried out by SIRRIS at 23%/50%

\*\* Maximum load per pedestal : refer to value 1/1

### Recommandation de sécurité pour l'utilisation du système de plots Buzon :

1. Zones réservées à l'accès de piétons : diviser la charge indiquée dans le tableau par 2 avec un facteur de sécurité supplémentaire de -15%.
2. Zones réservées à des applications industrielles et techniques : diviser la charge indiquée dans le tableau par 4 avec un facteur de sécurité supplémentaire de -15%.

## SAFETY INSTRUCTIONS

Buzon pedestals are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.



Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This brochure is for descriptive purpose only and is based on the product as on the date of publication of this information.

BPI 2024 © Copyright Buzon Pedestal International SA Buzon  
PB is a mark of Buzon Pedestal International SA.