

## Technical Data Sheet

**U-E20 Shim thickness 3/32"**  
(2 mm)

### COMPONENTS


The U-E20 is composed of 1 piece.

### CHARACTERISTICS

Weight: **1.1 oz.**  
Diameter: **5 7/8"**  
Thickness: **3/32"**

### MATERIAL

Material: **SBR**  
Hardness Shore A Din 53505: **60-80 SHA**  
Color: **Black**  
Temperature range: **-22°F to +158°F**  
Tensile Strength Din 53504: **3 Mpa**  
Elongation at break DIN 53504: **250%**  
Resistant to weathering, sea salts, algae and a wide range of chemicals

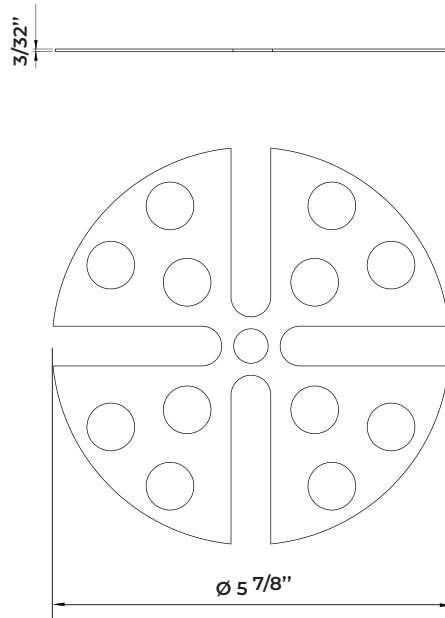

### PACKAGING

Pieces per carton: **240 pcs**  
Carton weight: **17.8 lb.**  
Carton dimension: **16" x 12" x 6"**  
Cartons per pallet: **48 pcs**  
Pieces per pallet: **11 520 pcs**  
Pallet dimensions: **31" x 47" x 43"**

### APPLICATIONS

The U-E20 leveller is a 3/32" (2 mm) clover-shaped shim. Placed on the Buzon pedestal, it stabilises the paver, provides additional acoustic values, and because it can be split, it compensates for variations in paver thickness.

### SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.