



[www.buzonusa.us](http://www.buzonusa.us)



## Technical Data Sheet

**U-WALL** (PATENT PENDING) Spacer at a wall edge

### COMPONENTS

The U-WALL is composed of 1 piece.

### CHARACTERISTICS

Weight: **1.4 oz.**

Additional height: **1/8"**

To be used only with 1/4" (6mm) tabs (maximum).

### MATERIAL

Copolymer polypropylene (CPP)

Composition: **+/- 80%** first grade pre-selected recycled PPC, and **+/- 20%** Talc + Masterbatch black

Designed and manufactured in Europe

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide range of chemicals

Temperature range: **-22°F to +176°F**

### PACKAGING

Pieces per carton: **24 pcs**

Carton weight: **2.3 lb.**

Carton dimension: **9" x 9" x 3"**

Cartons per pallet: **620 pcs**

Pieces per pallet: **14880 pcs**

Pallet dimensions: **39" x 47" x 87"**



### APPLICATIONS

Maintains a regular space **3/16"** (5 mm) between the paver and the wall.

Accessories are available for applications with various outdoor finishes, such as granite stone pavers, composite / timber decking, ceramic tiles and fibreglass or metal.

### SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

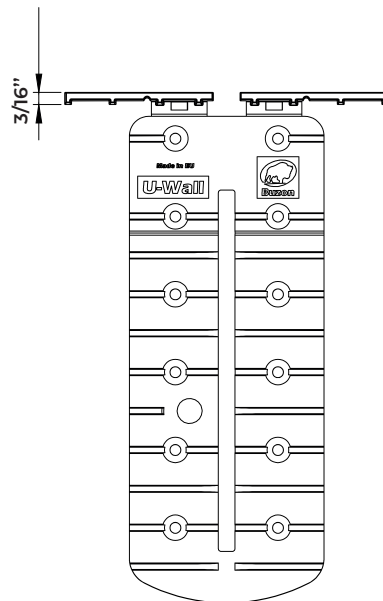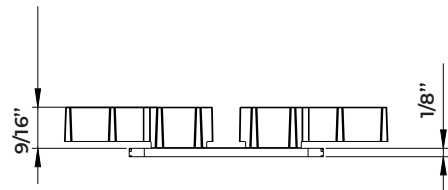

Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This brochure is for descriptive purpose only and is based on the product as on the date of publication of this information.

BPI 2024 © Copyright Buzon Pedestal International SA Buzon

