



[www.buzonusa.us](http://www.buzonusa.us)



## Technical Data Sheet

### U-FIXING-PLATE 5 U-BRS alluminium joist fixation

#### COMPONENTS


The U-FIXING-PLATE 5 is composed of 1 piece.

#### CHARACTERISTICS

Weight: **3 oz.**

Additional height: **1/8"**

Diameter: **7"**



#### MATERIAL

Copolymer polypropylene (CPP)


Composition: **+/- 80%** first grade pre-selected recycled PPC, and **+/- 20%** Talc + Masterbatch black

Designed and manufactured in Europe

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide range of chemicals

Temperature range: **-22°F to +176°F**

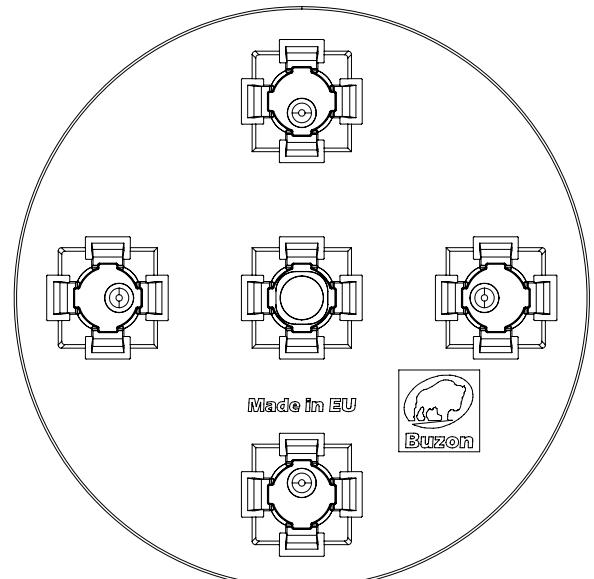

#### PACKAGING

Pieces per carton: **120 pcs**

Carton weight: **375 oz.**

Carton dimension: **21" x 14" x 11" mm**

Cartons per pallet: **35 pcs**

Pieces per pallet: **4200 pcs**

Pallet dimensions: **39" x 47" x 87"**

#### APPLICATIONS

**U-FIX-PLATE 5** is required for fixing the joists on the BUZON pedestals. The kit is compatible with all the ranges. With the PB and BC ranges, you need to use the **Rack Plug Large** to fix the kit. With the DPH pedestals, you need to use the **Rack Plug Medium**.

#### SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This brochure is for descriptive purpose only and is based on the product as on the date of publication of this information.

BPI 2024 © Copyright Buzon Pedestal International SA Buzon

