



Technical Data Sheet

U-TRAY-TABS

Rubber disc with spacer tabs for U-TRAY

DESCRIPTION



U-TRAY-TABS facilitate precise leveling of the grids by adjusting directly on the support before flooring installation.

COMPOSITION

Material : Thermoplastic vulcanized rubber (TPV)
 Paint : Paint-free

CHARACTERISTICS

Diameter: 5 1/8"
 Available spacer tabs: 3/32" - 1/8" - 3/16"
 Thickness: 13/16"
 Weight: 1 oz to 1.2 oz
 Colours: Black
 Composition/nbr. Pcs: 1

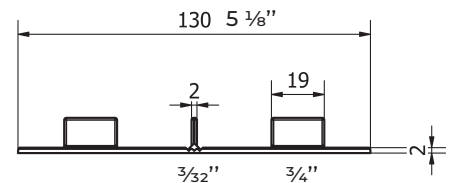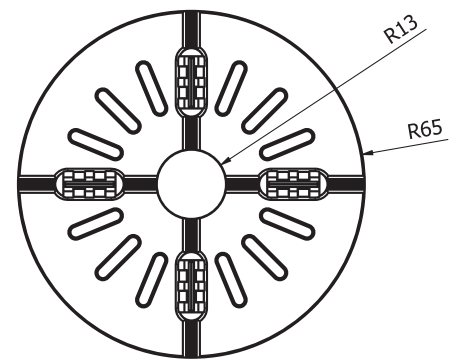

PACKAGING

Sales unit: Per unit
 Packaging: 100 pcs. Box

APPLICATION

We recommend the U-TRAY combined with the U-TRAY-TABS (TPV antinoise laying rubber), which guarantees a 3/32" - 1/8" - 3/16" joint line between the tiles, depending on the specific requirements of the project.

SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support raised floors used only by pedestrians. They cannot support or be subjected to moving or vibrating machinery and equipment. This includes cars, maintenance vehicles and similar equipment.

Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This technical data sheet is for descriptive purpose only and is based on the product as on the date of publication of this information.